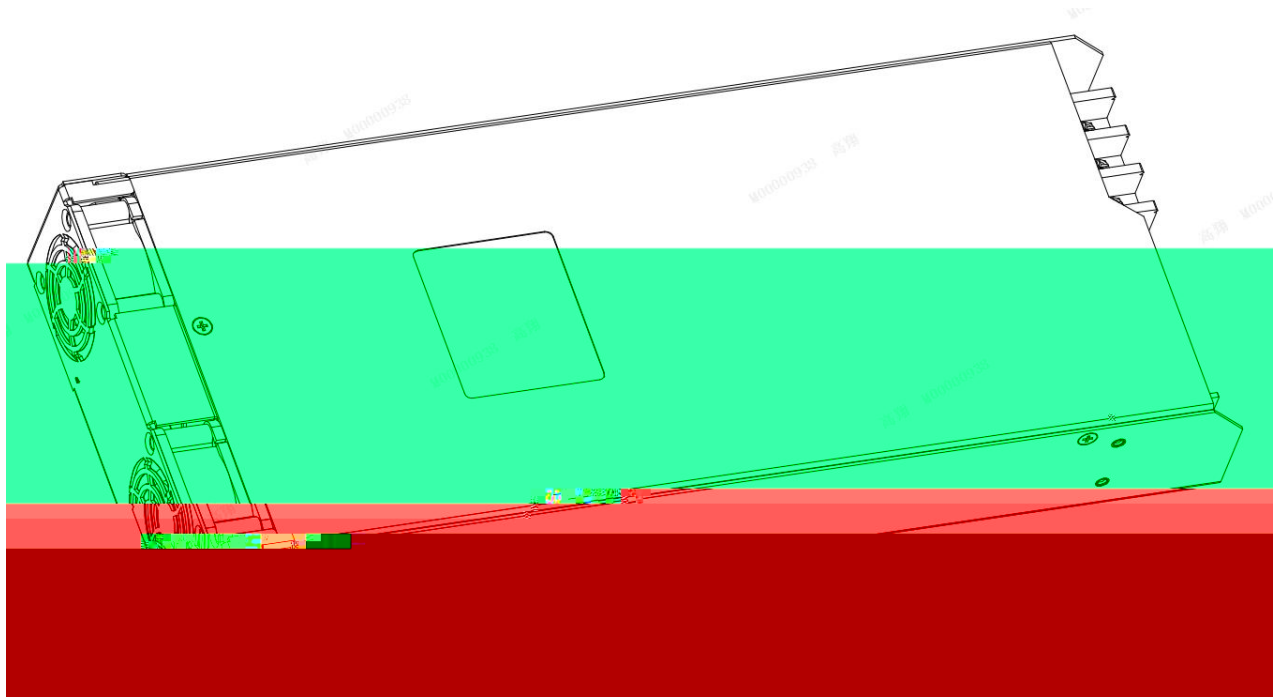

| | | |
|--|--|--|
| | | |
| | | |

EMC



AC/DC

- 1 : -15°C to +45°C
- 2 : -40°C to +85°C
- 3 : 95%
- 4 3000
- 5 3000
- 6 70~106KPa
- 7
- 8

| 1 | | Vac | 180 | 220 | 280 | |
|---|-------|-----|-----|------|-----|------|
| 2 | | Hz | 45 | 50 | 65 | |
| 3 | | A | | | 24 | |
| 4 | | A | | | 60 | 264V |
| 5 | PF | | | 0.95 | | |
| 6 | I THD | % | | | | |

| | | / | | | | |
|------|---|---|-----|---|-----|-----|
| | V | | 285 | / | 320 | 10% |
| | V | | 260 | / | 290 | |
| | V | | 140 | / | 160 | 10% |
| | V | | 160 | / | 180 | |
| | | | | | | |
| | V | | | | 78 | |
| | A | | | | 53 | |
| | A | | | | | |
| 48V | V | | 51 | | 58 | |
| 48V | A | | 12 | | 18 | |
| 48V | A | | | | | |
| 24V1 | V | | 27 | | 32 | |
| 24V1 | A | | 6 | | 18 | |
| 24V1 | A | | | | | |
| +15V | V | | 19 | | 22 | |
| 15V | A | | 3 | | 5 | |
| 15V | A | | | | | |

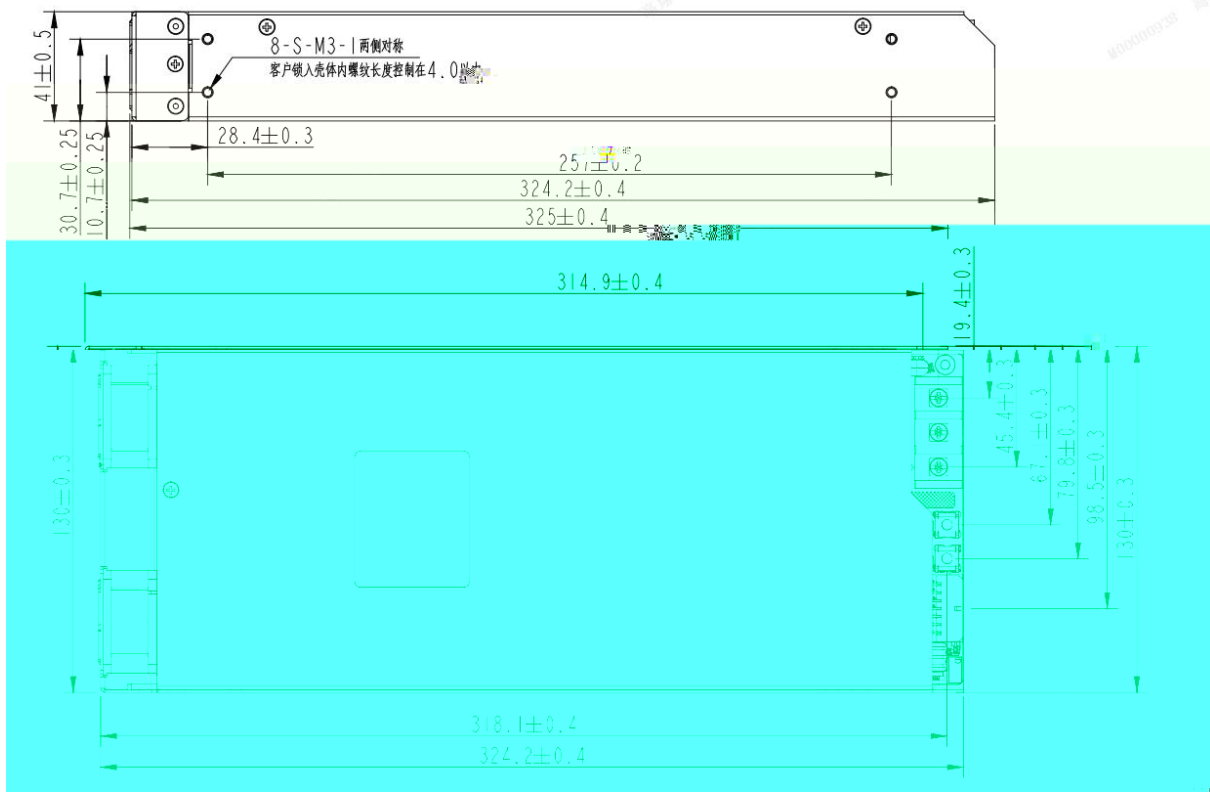
1

| | |
|---------|------------|
| | |
| 2000Vac | 2000Vac /1 |

| | | |
|-------|--|---------|
| (CE) | CLASS A | EN55022 |
| (RE) | CLASS A | |
| | 6KV :IEC61000-4-2; 8KV Class B | |
| | 8KV IEC61000-4-2; 10KV Class B | |
| (CS) | IEC61000-4-6 LEVEL3 Class A | |
| (RS) | IEC61000-4-3 LEVEL3 Class A | |
| (EFT) | IEC61000-4-4 LEVEL4 Class A | |
| | IEC61000-4-5 LEVEL4 Class A 2KV, 4KV | |
| | IEC61000-4-11 70%U 100ms, 0%U 10ms, 0 Class B | |

Class A
Class B
Class C
Class D

| | | | |
|---|------|--|------|
| 1 | | 1.5 60dB A 1 | |
| 2 | MTBF | 100000H Telcordia SR332 | |
| 3 | | *5 9Hz 3.5mm 9 200 Hz 10m/s2,3 5 3*50 | |
| 4 | | 250m/s2 6ms 6 | |
| 5 | | 500 | |
| 6 | | | |
| 7 | | RoHs2.0 | |
| 8 | | L/N/PE 5Min L1/L2/L3 2Min 10 | |
| 9 | | ISO 13849-1 2006 | PL-E |



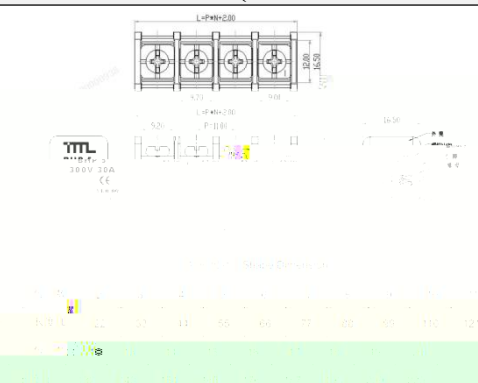



× × 325*130*41mm
()

| | | | | |
|--|-------------------|---|----|----|
| | | | | |
| | (BHP5-03-11.0-01) | 1 | L | AC |
| | | 2 | N | AC |
| | | 3 | PE | |

| | | | | |
|--|-------------------|--|--------|--|
| | | | | |
| | L (AT448080-1) | | Vout1- | |
| | | | Vout1+ | |

| | | | | | |
|--|---------------------|--------|---------|------|--------|
| | | | | | |
| | CJT C3030WR-2*7P | 1/8/9 | 48VGND | 48V | 24/48V |
| | | 2/3/10 | 48V | 48V | |
| | | 4/11 | 24V1GND | 24V1 | |
| | | 5/12 | 24V1 | 24V1 | |
| | | 6/7 | VCOM | 15V | 15V |
| | | 13 | +15V | +15V | |
| | | 14 | -15V | -15V | |

| | | | | | |
|--|-------------------|---|--------|------------|---------------------|
| | | | | | |
| | A2008WR-S1-F-2x4P | 1 | GND | ON/OFF | 24/48V |
| | | 2 | AC_OK | OK , | 0.5V 4.5V 5.25V. |
| | | 3 | DC_OK | OK , | 0.5V 4.5V 5.25V. |
| | | 4 | GND | ON/OFF | 24/48V |
| | | 5 | ON/OFF | SW | 0.7V |
| | | 6 | PE_OK | PE OK , PE | 0.5V 4.5V 5.25V. |
| | | 7 | GND | ON/OFF | 24/48V |
| | | 8 | NC | | |

| | | |
|--|-------------------|--|
| | | (|
| | (BHP5-03-11.0-01) |  |
| | L (AT448080-1) |  |
| | CJT C3030WR-2*7P |  |
| | A2008WR-S1-F-2x4P |  |

20cm

-40 +70°C

≤90%

50cm

2

| | | | | |
|--------------------------------------|---|-----|------|-------|
| GB/T 2423.1-2008 | 2 | A | | |
| GB/T 2423.2-2008 | 2 | B | | |
| GB/T 2423.3-2016 | 2 | Cab | | |
| GB/T 2423.4-2008 | 2 | Db | (12h | 12h) |
| GB/T 2423.5-1995 | 2 | Ea | | |
| GB/T 2423.6-1995 | 2 | Eb | | |
| GB/T 2423.8-1995 | 2 | Ed | | |
| GB/T 2423.10-2008 | 2 | Fc | () | |
| GB/T 2423.11-1997 | 2 | Fd | | |
| GB/T 2423.22-2012 | 2 | N | | |
| EN 55032-2015 | | | | |
| GB T 17626.2-2018 | | | | |
| GB T 17626.3-2016 | | | | |
| GB T 17626.4-2018 | | | | |
| GB T 17626.5-2019 | | | () | |
| GB T 17626.6-2017 | | | | |
| GB T 17626.8-2006 | | | | |
| GB T 17626.11-2008 | | | | |
| GB/T 17625.8-2015/IEC61000-3-12:2004 | | | 16A | 75A |
| GB/Z 17625.3-2000 | | | 16A | |
| GB/T 17625.7-2013 | | | 75A | |
| GB 4943.1-2011 | 1 | | | |
| GB T 4798.1-2005 | | | 1 | |
| GB T 4798.2-2008 | | | 2 | |